


OPERATING DATA:

MAX.PRESSURE : 10 bar
 MAX.WORKING TEMPERATURE : 120 °c
 SPEED RANGE : 1 – 100 rpm
 NOMINAL FLOW: 60 l/min

003	185	206.5	5.0
002	175	196.5	4.9
001	160	181.5	4.8
4.973444.V	120	141.5	4.5
VERSIONS SUPPLY	A	B	WEIGHT (kg)

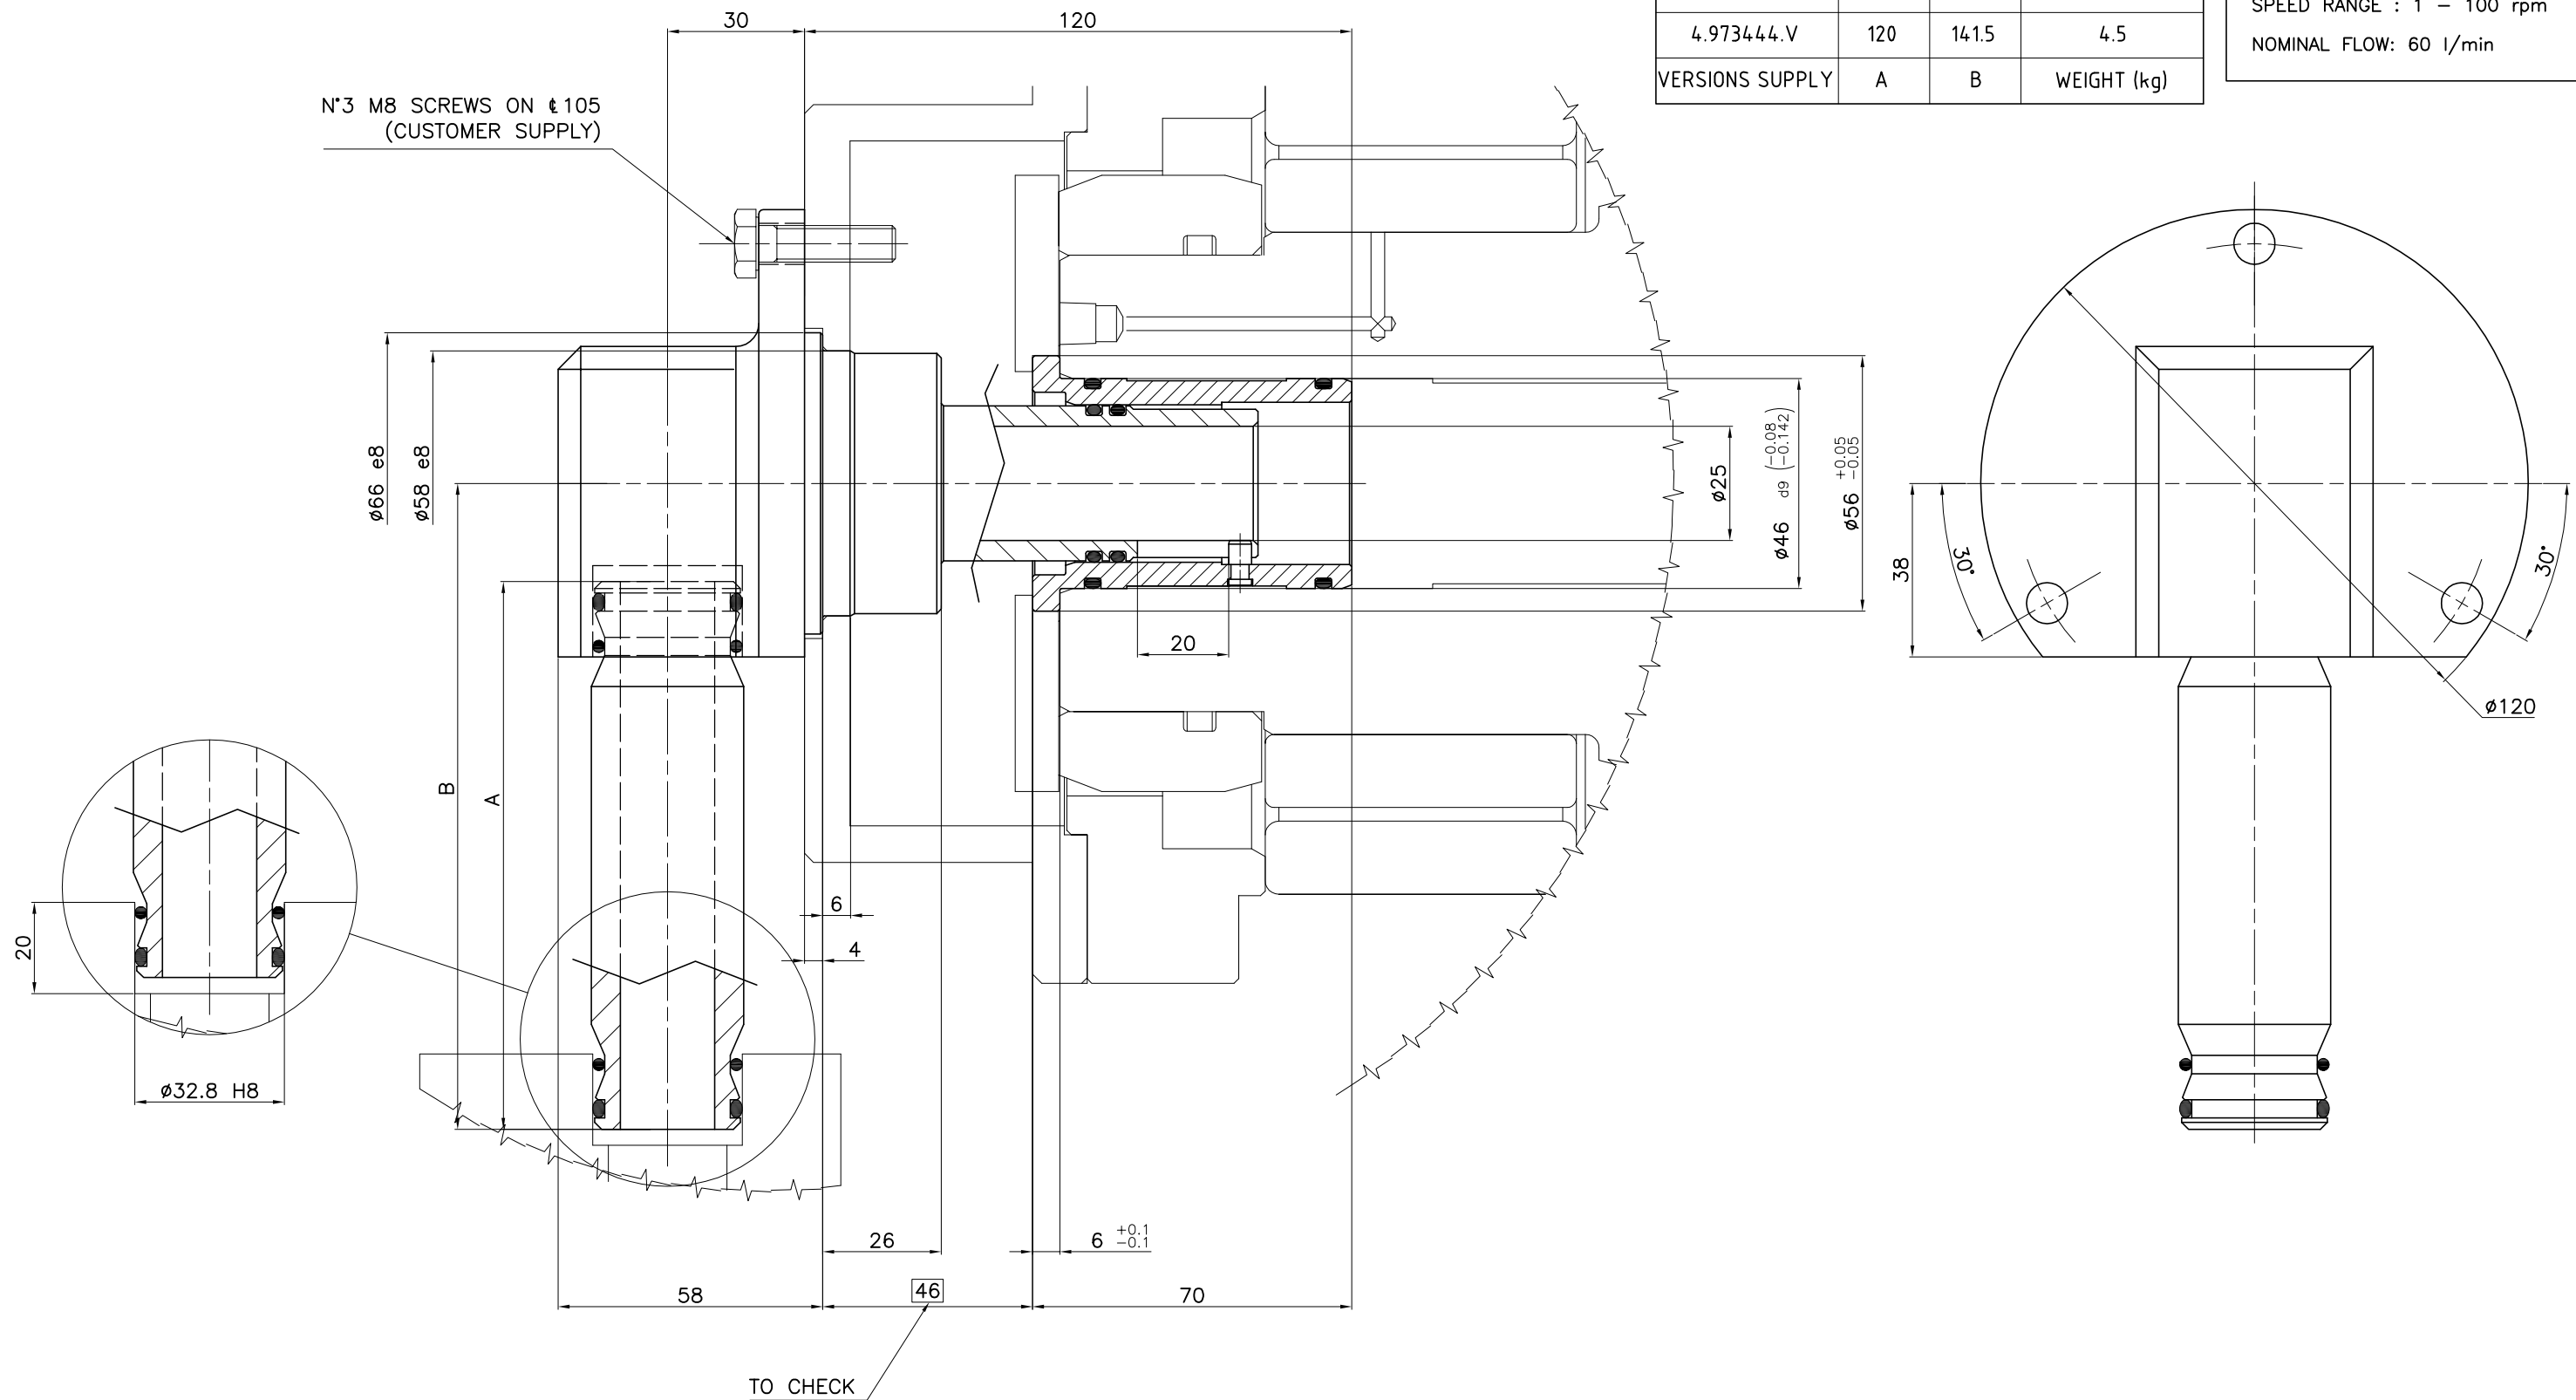

© 2019 PROPERTY OF JOHNSON-FLUITEN Srl THE DRAWING AND ITS INFORMATION ARE CONFIDENTIAL AND MUST BE RETURNED IF REQUESTED BY JOHNSON-FLUITEN Srl.			
Permissible deviations on untoleranced machining dimensions as below	PATTERN NO:	REFERENCE DRAWING:	TREATMENT:
ISO 2768-m	ANGULAR TOLERANCE: ± 0°30'	REQUEST NO:	MATERIAL:
Tolerance	DEBURR:	LOCATION: 243	:N. AMERICA :EUROPE :ASIA :S. AMERICA
mm	± mm	DRAWN BY: Maccora-A	TITLE: ROTARY JOINT TYPE G-50426
Up to 6	0.1	CHECKED BY: L.M.	
6-30	0.2	DATE: 06/06/2019	ARTICLE NO: G-50426-0000
30-120	0.3	PROJECTION:	SCALE: 1:1
120-400	0.5	JOHNSON-FLUITEN	PAGE: OF:
400-1000	0.8	www.johnson-fluiten.com	DRAWING NO: F50426
1000-2000	1.2		REV:
2000-4000	2		