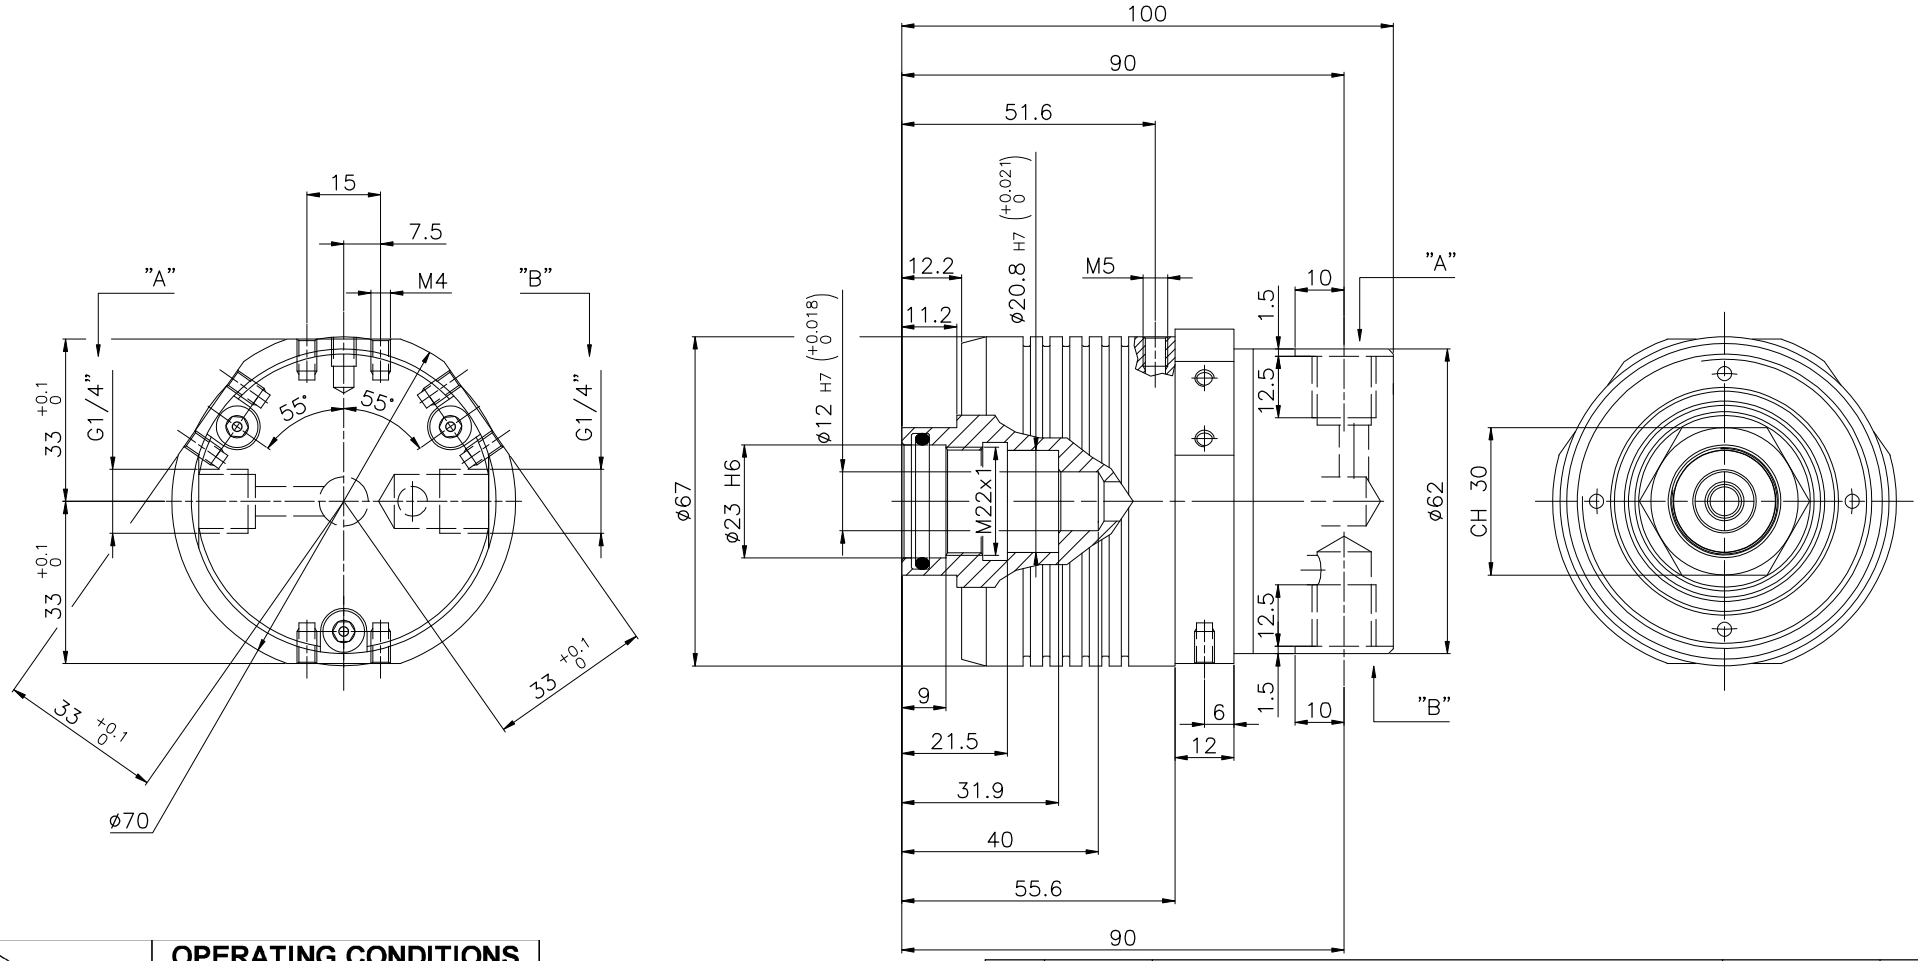

			OPERATING CONDITIONS	
			MAX. SPEED	3000 RPM
			MAX. TEMPERATURE	70°C
			FILTERING	50 micron
CONNECTIONS	A	G 1/4"	MEDIA	HYDRAULIC OIL
			MAX. PRESSURE	70 barG
	B	G 1/4"	MEDIA	HYDRAULIC OIL
			MAX. PRESSURE	50 barG @ 0 rpm

INDICE MODIFICHE	DATA	DESCRIZIONE	DISEGNATO	APPROVATO
2	19/11/2021	MODIFICATO CENTRAGGIO Ø23 H6, ERA Ø22 H6 Ø23 H6 PILOT MODIFIED. IT WAS Ø22 H6	maccora-a	L.M.
1	18/11/2021	AGGIORNATA SAGOMA E CONDIZIONI ESERCIZIO EXTERNAL SHAPE AND WORKING CONDITIONS UPDATED	maccora-a	L.M.

© 2021 PROPERTY OF JOHNSON-FLUITEN Srl THE DRAWING AND ITS INFORMATION ARE CONFIDENTIAL AND MUST BE RETURNED IF REQUESTED BY JOHNSON-FLUITEN Srl.

Permissible deviations on untoleranced machining dimensions as below

ISO 2768-m

Tolerance

mm	± mm
Up to 6	0.1
6-30	0.2
30-120	0.3
120-400	0.5
400-1000	0.8
1000-2000	1.2
2000-4000	2

PATTERN NO:

REFERENCE DRAWING:

TREATMENT:

ANGULAR TOLERANCE: ± 0°30'

REQUEST NO:

LOCATION: 243

MATERIAL:

:N. AMERICA
:EUROPE
:ASIA
:S. AMERICA

DEBURR:

DRAWN BY: CG

CHECKED BY: LM

DATE: 21/10/21

PROJECTION:

TITLE: ROTARY JOINT TYPE G-50522

JOHNSON-FLUITEN
www.johnson-fluiten.com

ARTICLE NO: G-50522-0000

SCALE: 1:1

PAGE: 1 OF: 1

DRAWING NO: F50522

REV: 2

V1.2